


A PROJECT : _____
 ITEM #: _____

QTY OF GATES REQUIRED : _____

MATERIAL : 304 L SS
 316 L SS
 ALUMINUM
 OTHER: _____

B GATE SIZE

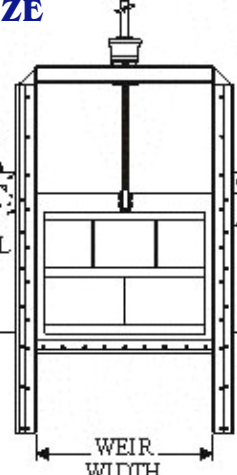

Operating Floor

CHANNEL DEPTH


Invert

WEIR TRAVEL


WEIR WIDTH

C REMARKS

D STEM ARRANGEMENT


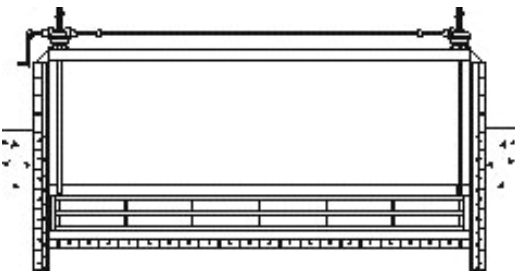



DUAL STEM ARRANGEMENT

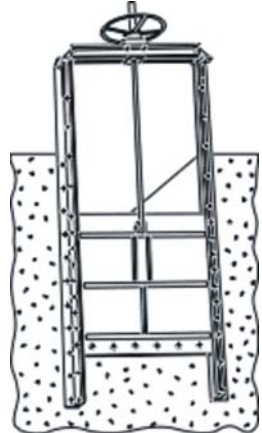

TYPICAL WEIR

E HOIST REQUIREMENTS

MANUAL → HAND CRANK HAND WHEEL SQUARE NUT

ELECTRIC → VOLTS: _____ PHASE: _____ CYCLES: _____


CYLINDER → OIL WATER AIR OPERATING PRESSURE (PSI) _____

STEM COVER
 CLEAR POLYCARBONATE
 GALVANIZED STEEL


POSITION INDICATOR
 MYLAR STRIP
 COUNTER (for non-rising only)

STEM CONFIGURATION
 RISING STEM
 NON-RISING STEM


F LIFT MOUNTING




PEDESTAL MOUNTED TO SLAB



T-WRENCH

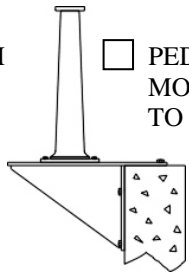

PEDESTAL MOUNTED TO BRACKET

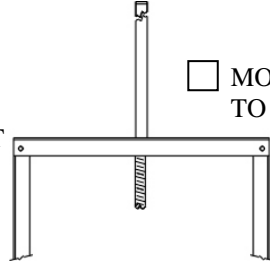

MOUNTED TO YOKE